


## iQ500, Gas hob, 75 cm, Tempered glass, Black EP7A6QB90

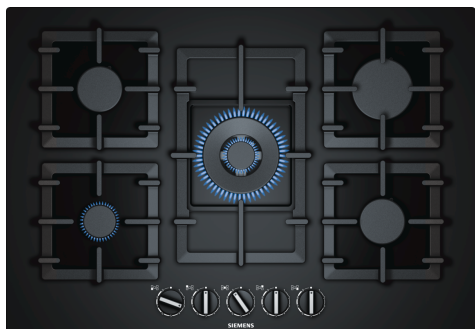

The gas hob with stepFlame Technology for precise flame control in nine steps.

HZ211310	Simmer cap
HZ298105	Simmer plate
HZ298107	Wok ring
HZ298114	Small pot support

Product name/family: ..... gas hob w  
integrated controls  
Built-in / Free-standing: ..... Built-in  
Source of energy: ..... Gas  
Number of cooking zones: ..... 5  
Type of control setting devices: ..... sword knobs  
Min. required niche size for installation (HxWxD): ....45 x 560-562 x  
480-492 mm  
Width of the appliance: ..... 752 mm  
Dimensions: ..... 58x752x520 mm  
Dimensions of the packed product (HxWxD): ... 145 x 793 x 597 mm  
Weight: ..... 19.0 kg  
Gross weight: ..... 20.5 kg  
Residual heat indicator: ..... without  
Location of control panel: ..... Front  
Basic surface material: ..... Tempered glass  
Color of surface: ..... Black  
Color of frame: ..... Black  
Length electrical supply cord: ..... 100.0 cm  
EAN code: ..... 4242003742549  
Gas connection rating: ..... 11500 W  
Fuse protection: ..... 3 A  
Nominal power: ..... 220-240 V  
Frequency: ..... 60; 50 Hz



## iQ500, Gas hob, 75 cm, Tempered glass, Black EP7A6QB90

### Design

- Tempered Glass surface, black
- frameless design: install the hob either flush or slightly raised on the worktop
- Cast iron pan supports with rubber feet

### Usage convenience

- Step Flame technology - 9 steps: precisely control and adjust the flame in nine defined levels.
- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

### Burners and power

- 5 burner gas hob including:
  - Left front: Economy burner up to 1 KW (depending on gas type)
  - Left rear: Standard burner up to 1.75 KW (depending on gas type)
  - Center front: wok burner up to 4 KW (depending on gas type)
  - Right rear: High-speed burner up to 3 KW (depending on gas type)
  - Right front: Standard burner up to 1.75 KW (depending on gas type)

### Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

### Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 58 x 752 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Power cord: 1 m
- Connected load: 11.5 KW

**iQ500, Gas hob, 75 cm, Tempered glass, Black EP7A6QB90**

